

submersible pumps & motors

SUVER[®]

RELIABLE
SOLUTIONS
FOR A BETTER
TOMORROW

submersible pumps & motors

SUVER[®]

SOLAR PANEL

CLEAN
ENERGY
SUSTAINABLE
FUTURE

www.suver.com.tr

SUVER-60

265/270/275/280/285P

All-Purpose Module

SUVER-60 is a robust solar module with 60 solar cells. These modules are suitable for on-grid solar applications. Our meticulous design and production techniques ensure high-yield, long-term performance. Rigorous quality control and in-house testing help SUVER modules meet demanding quality standards.

Polycrystalline Silicon Solar Modules

Features



High module conversion efficiency (up to 18.80%), through superior manufacturing technology



Guaranteed 0- +5W positive power output tolerance ensures high reliability




Anti-reflective, hydrophobic coating improves light absorption and reduces surface dust



Excellent performance under low light environments (mornings, evenings and cloudy days)



Entire module certified to withstand high wind loads (2400 Pascal) and snow loads (5400 Pascal)*

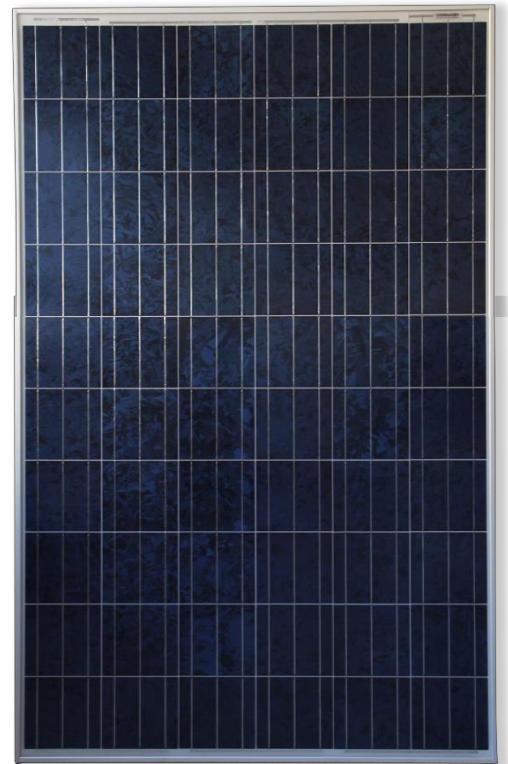


All-purpose Module

SUVER's international sales network covers more than 20 countries, supported by responsive after-sales service and an efficient supply chain. Our team works closely with customers across Europe, Oceania, Eastern Europe, East Asia, the Middle East and Africa to deliver dependable solar solutions.



SUVER's reputation is built on more than 200 MW of high-performance solar modules installed around the world.

Industry-leading warranty

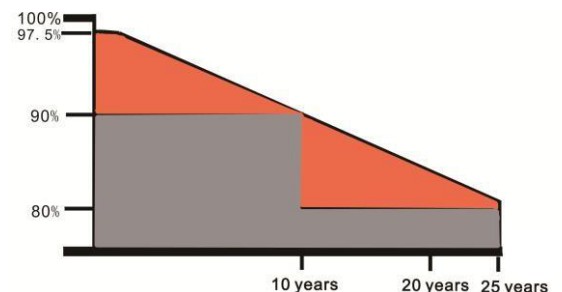

•25 year transferable power output warranty: 10year/90%; 25year/80%.

•Based on nominal power.

•10 year material and workmanship warranty.

SUVER-60

265/270/275/280/285P

Electrical Data


STC	SVR-265-60	SVR-270-60	SVR-275-60	SVR-280-60	SVR-285-60
Nominal Maximum	265W	270W	275W	280W	285W
Optimum Operating	30.8V	31.0V	31.2V	31.2V	31.3V
Optimum Operating	8.60A	8.71A	8.81A	8.97A	9.10A
Open CIRCUIT voltage(Voc)	37.5V	37.7V	37.8V	37.8V	37.8V
Short Circuit Current(Isc)	9.08A	9.43A	9.43A	9.50A	9.53A
Module Efficiency	18.20%	18.60%	18.80%	19.00%	19.20%
Operating Temperature	-40°C~+85°C				
Maximum System Voltage	1000V(IEC)/600V(UL)				
Maximum Series Fuse Rating	15A				
Application Classification	Class A				
Power Tolerance	0 ~ + 5W				

Under Standard Test Conditions (STC) of irradiance of 1000W/m², spectrum AM 1.5 and cell temperature of 25°C

NOCT	SVR-265-60	SVR-270-60	SVR-275-60	SVR-280-60	SVR-285-60
Nominal Maximum Power (Pmax)	198W	202W	205W	208W	211W
Optimum Operating Voltage (Vmp)	30.0V	30.2V	30.4V	30.4V	30.5V
Optimum Operating Current (Imp)	6.60A	6.69A	6.74A	6.84A	6.92A
Open Circuit Voltage (Voc)	34.7V	34.9V	35.1V	35.1V	35.3V
Short Circuit Current (Isc)	7.15A	7.20A	7.24A	7.30A	7.38A

Under Normal Operating Cell Temperature, irradiance of 800 W/m²,spectrum AM 1.5,ambient temperature 20°C wind speed 1m/s

IV-Curves


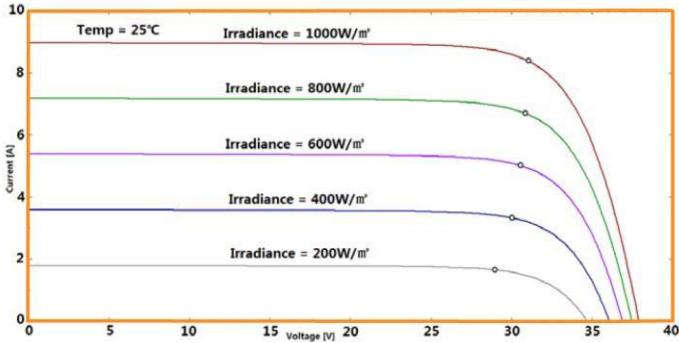


Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.43%/°C
Temperature Coefficient of Voc	-0.34%/°C
Temperature Coefficient of Isc	0.065%/°C

Packing Configuration

Container	20' GP	40' HQ
Pieces	300	832

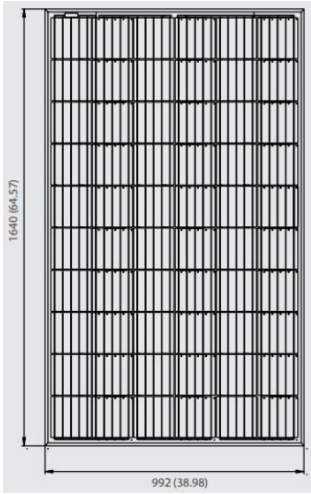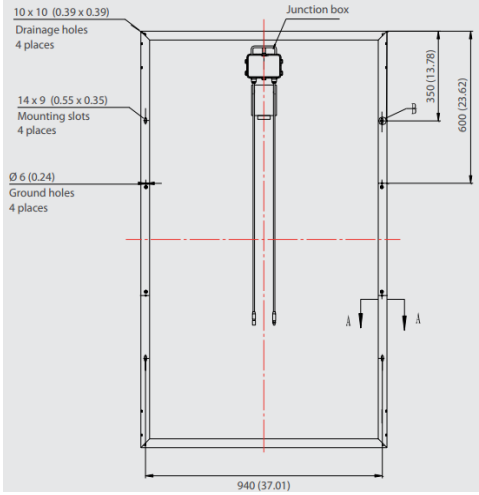

Mechanical Data

Cell Type	Poly-crystalline 156.75x156.75mm, 4 or 5BB
Cell Arrangement	60 (6x10)
Dimensions	1640 x 990 x 35mm (64.57 x 38.98 x 1.38in)
Weight	19kg
Front Cover	3.2mm Tempered Glass
Frame Material	Anodized Aluminum Alloy
J-BOX	IP67, 6 Diodes
Cable	4mm2(IEC)/12AWG(UL),900mm
Connectors	MC4 or MC4 Comparable
Standard Packaging (Modules per Pallet)	30pcs
Module Pieces per container (40HQ)	832pcs (40'HQ)

SUVER

submersible pumps & motors

SOLAR PANEL

RELIABLE ENERGY FOR WATER

RELIABLE
SOLUTIONS
FOR A BETTER
TOMORROW

submersible pumps & motors

NIMAK SUBMERSIBLE PUMP LTD. CO.

HEADQUARTERS

1st Organized Industrial Zone
303rd Street, No: 5
Sanliurfa / Turkiye

+90 507 997 71 41
muhassebe@suver.com.tr

FACTORY & EXPORT OFFICE

1st Organized Industrial Zone, 303rd Street, No: 5 - Sanliurfa / Turkiye

+90 542 234 37 17 | export@suver.com.tr | suverpump@outlook.com

IZMIR SALES OFFICE

Yunus Emre, 7402. Street
No: 4/B, 35060 Bornova
Izmir / Turkiye

+90 542 648 51 41
info@suver.com.tr

www.suver.com.tr

Tax Office: Sehitlik | Tax No: 6311976314